


Vector H320 GNSS Compass Module

Advanced Heading & RTK Positioning

key features

- Extremely accurate heading with short baselines
- L1/L2 GPS/GLONASS RTK capable
- L-band DGNSS/HP/XP (OmniSTAR®) capable
- Excellent coasting performance
- Fast RTK acquisition and reacquisition times
- 5 cm rms RTK-enabled heave accuracy
- Strong multipath mitigation and interference rejection

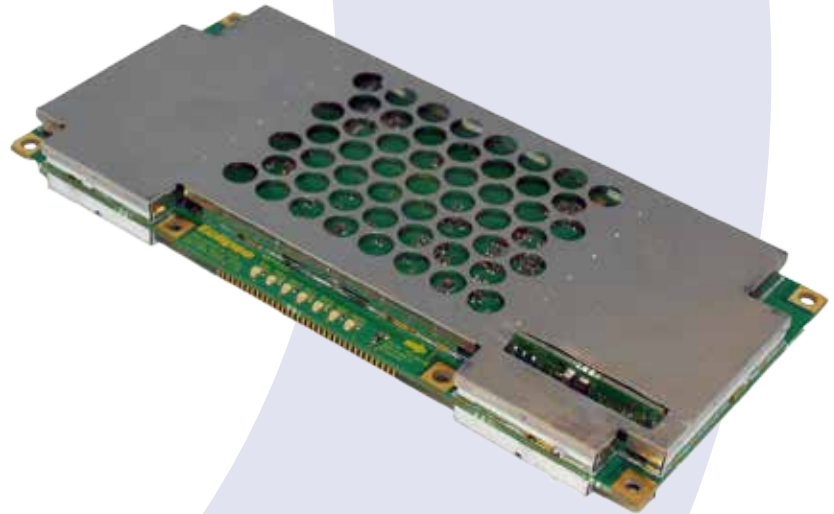

Develop sophisticated machine control and navigation solutions in a world full of complex dynamic environments. The Vector H320™ is our most advanced GNSS heading and positioning module available from Hemisphere GPS.

The Vector H320 utilizes dual antenna ports to create a series of additional capabilities to Eclipse™ Vector technology including fast, high-accuracy heading over short baselines, RTK positioning, onboard L-band DGNSS/HP/XP reception, RTK-enabled heave, low power consumption and precise timing.

Integrate the Vector H320 into your applications to experience exceptional performance, flexibility and cost savings. This incredible GNSS module uses advanced multipath mitigation techniques and offers full scalability and expandability from L1/L2 GPS/GLONASS to L1/L2 GPS/GLONASS RTK performance.



precision@hemispheregnss.com
www.hemispheregnss.com

Vector H320 GNSS Compass Module

GPS Sensor Specifications

Receiver Type:	Dual GNSS RTK	
Signals Received:	GPS, GLONASS, and GALILEO ⁷	
Channels:	270	
GPS Sensitivity:	-142 dBm	
SBAS Tracking:	3-channel, parallel tracking	
Update Rate:	10 Hz standard, 20 Hz optional	
Horizontal Accuracy:	RMS (67%)	2DRMS (95%)
RTK: ¹	10 mm + 1 ppm	20 mm + 2 ppm
L-band DGNSS/HP/XP (OmniSTAR): ^{2,8}	0.08 m	0.16 m
SBAS (WAAS): ²	0.25 m	0.50 m
Autonomous, no SA: ²	1.20 m	2.50 m
Heading Accuracy:	< 0.17° rms @ 0.5 m antenna separation < 0.09° rms @ 1.0 m antenna separation < 0.04° rms @ 2.0 m antenna separation < 0.02° rms @ 5.0 m antenna separation < 1° rms	
Pitch / Roll Accuracy:	30 cm rms (DGPS) ⁶ , 5 cm rms (RTK) ⁶	
Heave Accuracy:	20 ns	
Timing (1PPS) Accuracy:	100°/s maximum	
Rate of Turn:	< 40 s typical (no almanac or RTC)	
Cold Start:	< 20 s typical (almanac and RTC)	
Warm Start:	< 5 s typical (almanac, RTC and position)	
Hot Start:	< 10 s typical (Hot Start)	
Heading Fix:	50 Ω	
Antenna Input Impedance:	1,850 kph (999 kts)	
Maximum Speed:	18,288 m (60,000 ft)	
Maximum Altitude:		

L-band DGNSS/HP/XP Sensor Specifications


Sensitivity:	-130 dBm
Channel Spacing:	7.5 kHz
Satellite Selection:	Manual and Automatic
Reacquisition Time:	15 seconds (typical)
Rejection:	15 kHz spacing > 30 dB, 300 kHz spacing > 60 dB
Processor:	DSP for demodulation and protocol decoding module provides processing for the differential algorithms
Command Support:	Reports L-band DGNSS/HP/XP (OmniSTAR) region, satellite info, allows input and status of L-band DGNSS/HP/XP (OmniSTAR) subscription, Bit Error Rate output for reception quality indication and manual frequency tuning

Communications

Serial Ports:	4 full-duplex 3.3V CMOS (3 main serial ports, 1 differential-only port), 1 USB Host, 1 USB Device
Baud Rates:	4800 - 115200
Correction I/O Protocol:	RTCM SC-104, L-Dif TM , RTCM v2.3 (DGPS), RTCM v3 (RTK), CMR, CMR+
Data I/O Protocol:	NMEA 0183, Crescent binary ³ , L-Dif

- ¹ Depends on multipath environment, antenna selection, number of satellites in view, satellite geometry, baseline length (for local services), and ionospheric activity
- ² Depends on multipath environment, number of satellites in view, satellite geometry, and ionospheric activity
- ³ Hemisphere GPS proprietary
- ⁴ Under static conditions
- ⁵ This is the minimum safe distance measured when the product is placed in the vicinity of the steering magnetic compass. The ISO 694 defines "vicinity" relative to the compass as within 5 m (16.4 ft) separation
- ⁶ Based on a 40 second time constant
- ⁷ Upgrade required

Authorized Distributor:

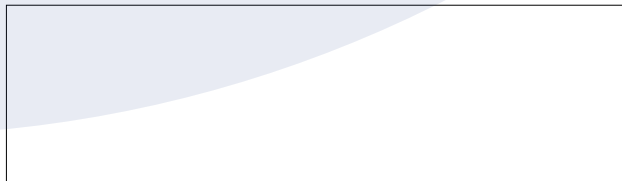

Copyright © 2013 Hemisphere GNSS Inc.
All rights reserved. Specifications subject to change without notice. Hemisphere and the Hemisphere logo are trademarks of Hemisphere GNSS Inc.

Timing Output:	1PPS, CMOS, active low, falling edge sync, 10 kΩ, 10 pF load
Event Marker Input:	CMOS, active low, falling edge sync, 10 kΩ, 10 pF load
Heading Warning I/O:	Pin 62
Power	
Input Voltage:	3.3 VDC +/- 5%
Power Consumption:	< 3.2 W at 3.3 V (L1/L2 GPS/GLONASS)
Current Consumption:	< 970 mA at 3.3 V (L1/L2 GPS/GLONASS)
Power Consumption:	< 3.9W at 3.3V (L1/L2 GPS/GLONASS; L-band DGNSS/HP/XP)
Current Consumption:	< 1180 mA at 3.3V (L1/L2 GPS/GLONASS; DGNSS/HP/XP)
L-band	
Antenna Voltage:	15VDC maximum
Antenna Short Circuit Protection:	Yes
Antenna Gain Input Range:	10 to 40 dB
Antenna Input Impedance:	50 Ω

Environmental


Operating Temperature:	-40°C to +85°C (-40°F to +185°F)
Storage Temperature:	-40°C to +85°C (-40°F to +185°F)
Humidity:	95% non-condensing (when installed in an enclosure)

Mechanical

Dimensions:	15.2 L x 7.1 W x 1.6 H (cm) 6.0 L x 2.8 W x 0.63 H (in)
Weight:	.105 kg (3.70 oz.)
Status Indication (LED):	Power, Primary and Secondary GPS lock, Differential lock, DGPS position, Heading, RTK lock, L-band DGNSS/HP/XP lock
Power/Data Connector:	70-pin male header, 0.05" pitch (1.27 mm)
Antenna Connectors:	MCX, female, straight

Aiding Devices

Gyro:	Provides smooth heading, fast heading reacquisition and reliable < 0.5° per min heading for periods up to 3 min. when loss of GPS has occurred ⁴
Tilt Sensors:	Provide pitch, roll data and assist in fast start-up and reacquisition of heading solution

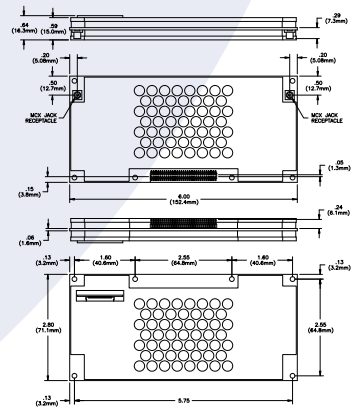

Hemisphere GNSS Inc.
8444 N. 90th Street, Suite 120
Scottsdale, AZ, USA 85258

Phone: (480) 348 6380
Fax: (480) 270 5070
precision@hemispheregnss.com
www.hemispheregnss.com